


M110i

695
AIRWATTS

Decibels	Décibels	Decibelios
	72	
Air flow	Débit d'air	Caudal de aire
110 M3/h		199 Ft3/h
Water lift	Dépression	Depresión
170 in		4318 mm
MAX amperes	Ampères MAX	Amps MAX
	8.7 A	
Voltage	Tension	Voltaje
	240 V	
Number of motors	Nombre de moteurs	Número de motores
	2	
Turbines per motor	Turbines par moteur	Turbinas por motor
	2	
Capacity Bag / Canister	Capacité Sac / Baril	Capacidad Bolsa / Depósito
9.9 IMP gal / 5.1 IMP gal		45L / 23.3L
Height	Hauteur	Altura
40.7 in		103.4 cm
Diameter	Diamètre	Diámetro
14 in		35.6 cm
Weight	Poids	Peso
35.7 lbs		16.2 kg
Principle	Principe	Principio
Cyclonic Action	Action Cyclonique	Acción Ciclónica
Filtration	Filtration	Filtración
Bag - Filter Option	Sac - Option Filtre	Bolsa - Opción Filtro

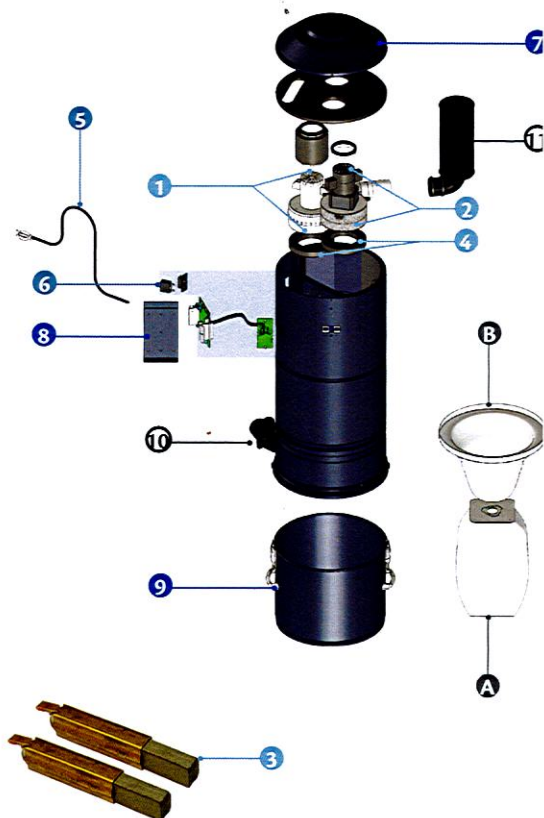

No.	Code	Description	Description	Descripción	Qty.
1	TMCY2003	Complete motor	Moteur complet	Motor Completo	1
2	FMCY2003T4	Complete motor	Moteur complet	Complete Motor	1
3	TMCARB13	Carbon brush	Brosse carbone	Cepillo de carbono	2
4	GASCUT20	Motor gasket	Joint moteur	Junta de motor	2
5	ELECOR03	Power cord	Cordon électrique	Cable eléctrico	1
6	ANNEX.	See Annex	Voir annexe	Ver anexo	1
7	NCOUV36C	Cover	Couvercle	Tapa	1
8	NSUPP02C	Wall bracket	Support mural	Soporte mural	1
9	FBARI10C01	Canister	Baril	Depósito	1
10	REPINTKG	Air intake kit	Kit entrée d'air	Kit entrada de aire	1
11	TENSMUF7	Muffler (option)	Silencieux (option)	Silenciador (opción)	1

A	TDSAC93M	Electrostatic bag	Sac électrostatique	Bolsa electrostática	(3x)
B	TDFILT65	Teflon Self-Cleaning filter	Filtre Teflon autonettoyant	Filtro autolimpiable Teflon	1